

# DMA STORAGE MODULUS SUDDENLY INTERRUPTED



How does DMA determine a complex modulus? From the measurements of the force, displacement and phase angle, DMA determines each component of the complex modulus. This estimate also depends on the sample's geometry, operational mode and boundary conditions.



What is the difference between storage modulus and dynamic loss modulus? The storage modulus is often times associated with ???stiffness??? of a material and is related to the Young's modulus,  $E$ . The dynamic loss modulus is often associated with ???internal friction??? and is sensitive to different kinds of molecular motions, relaxation processes, transitions, morphology and other structural heterogeneities.








Do DMA machines have different modulus? However, DMA machines presented a great variation of complex modulus from each operational mode and even in the same operational mode performed on different machines. The influence of sample's geometry was also tested by using two different sets of samples on the same machine.



How does DMA determine a material's properties? Based on these measurements, DMA can determine the material's properties, like modulus and viscosity [1, 19]. The material's modulus  $E^*(\omega)$  is reported over the test as a complex quantity that enables one to better analyze the material's behavior.



Why is dynamic loss modulus important? The dynamic loss modulus is often associated with ???internal friction??? and is sensitive to different kinds of molecular motions, relaxation processes, transitions, morphology and other structural heterogeneities. Thus, the dynamic properties provide information at the molecular level to understanding the polymer mechanical behavior.

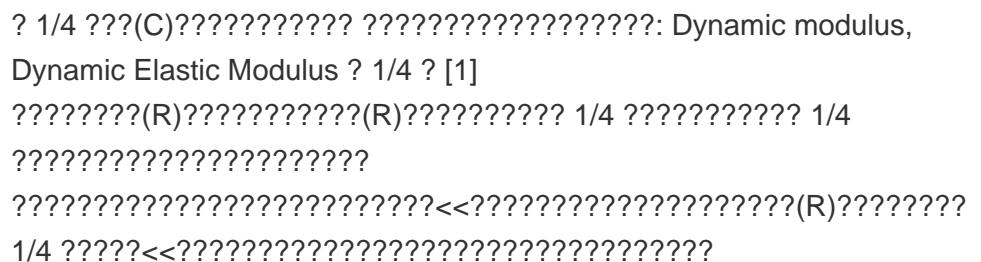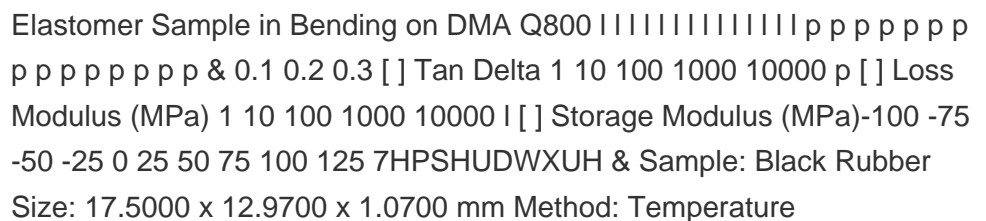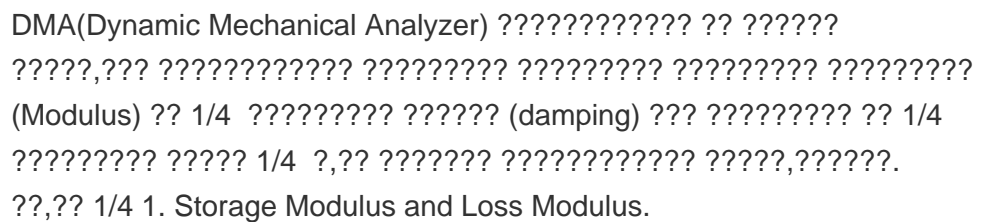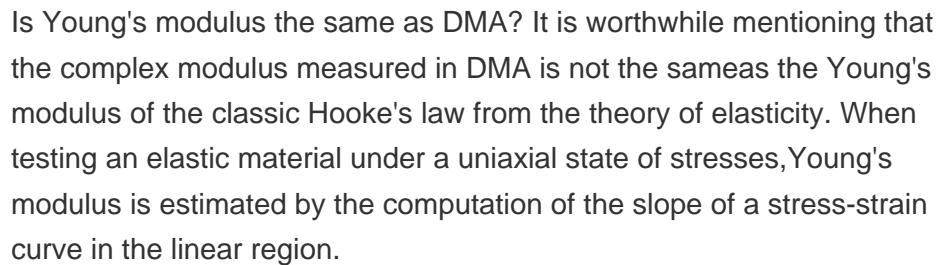

# DMA STORAGE MODULUS SUDDENLY INTERRUPTED



Comparing frequency and strain-rate domain results. The storage modulus master curve obtained fitting experimental  $E''(f)$  data from DMA was integrated numerically according to Eq. 11 (Methods) to



Dynamic Mechanical Analysis is a powerful technique for studying the mechanical properties of materials as a function of various variables. Storage Modulus ( $E''$  or  $G''$ ): This represents the material's elastic behavior. It quantifies how much energy the material can store and release during each cycle of deformation.



Epoxy carbon-fibre prepreg, Hexcel Type 6376 HTS, was investigated using Dynamic Mechanical Analysis (DMA). The DMA characteristic parameters are storage modulus  $E''$ , loss modulus  $E'''$  and loss factor  $\tan \delta$ . These parameters are ideally suited to observe the vitrification, referred to as glass transition, resulting from the cross-linking reaction.



Dynamic Mechanical Analysis (DMA) is one of the most sensitive techniques available for characterizing and interpreting the mechanical behavior of materials. The concept of DMA is based on observing the viscoelastic response of materials subjected to a small oscillatory strain. Shear storage modulus (GPa):



Dynamic mechanical analysis (DMA) is a testing method that measures the modulus and damping properties of materials as they are deformed under periodic stress. It is a sensitive technique ???

# DMA STORAGE MODULUS SUDDENLY INTERRUPTED



Dynamic mechanical analysis (DMA), also known as forced oscillatory measurements and dynamic rheology, is a basic tool used to measure the viscoelastic properties of materials (particularly polymers). Storage modulus; measures stored ???




In dynamic mechanical analysis, we look at the stress (??), which is the force per cross sectional unit area, needed to cause an extension in the sample, or the strain (?u).  $E = \frac{\text{stress}}{\text{strain}}$ . Alternatively, in a shear experiment:  $G = \frac{\text{shear stress}}{\text{shear strain}}$ . Dynamic mechanical analysis differs from simple tensile testing by performing the experiment cyclically.



If that is the case, then I have seen materials with a Young's modulus of 120 MPa, but a Storage modulus of 900 MPa. This would make the ball relatively stretchy, but somewhat rigid since it has a



The slope of the loading curve, analogous to Young's modulus in a tensile testing experiment, is called the storage modulus,  $E'$ . The storage modulus is a measure of how much energy must be put into the sample in order to distort it. The difference between the loading and unloading curves is called the loss modulus,  $E''$ . It measures energy lost

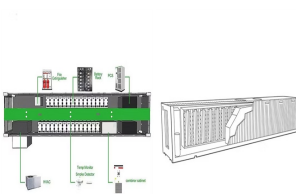

temperature using rheological methods and DMA: the onset of  $E''/G''$ ; taking the peak value of  $E''/G''$ , and the peak value of  $\tan(\delta)$ . The detailed analysis methods are discussed below. GLASS TRANSITION FROM THE STORAGE MODULUS The glass transition from the storage modulus onset is typically the lowest  $T_g$  measured by DMA and rheological

# DMA STORAGE MODULUS SUDDENLY INTERRUPTED

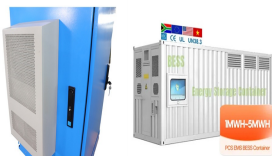


Figure 3. Storage and complex modulus of polystyrene (250 °C, 1 Hz) and the critical strain (?? c ). The critical strain (44%) is the end of the LVR where the storage modulus begins to decrease with increasing strain. The storage modulus is more sensitive to the effect of high strain and decreases more dramatically than the complex modulus.



The dynamic mechanical analysis method determines [12] elastic modulus (or storage modulus,  $G''$ ), viscous modulus (or loss modulus,  $G''''$ ), and damping coefficient ( $\tan \delta$ ) as a function of temperature, frequency or time. Results are usually in the form of a graphical plot of  $G''$ ,  $G''$ , and  $\tan \delta$  as a function of temperature or strain.



sample. The storage modulus remains greater than loss modulus at temperatures above the normal molten temperature of the polymer without crosslinking. For a crosslinked polymer, the storage modulus value in the rubbery plateau region is correlated with the number of crosslinks in the polymer chain. Figure 3.



Dynamic Mechanical Analysis (DMA) is a technique used to study the frequency dependence of the mechanical properties of materials. It measures the storage modulus ( $G''$ ), loss modulus ( $G''''$ ), and damping coefficient ( $\tan \delta$ ) as a function of frequency ( $f$ ), temperature ( $T$ ), and force ( $F$ ). The results are typically plotted as  $G''$ ,  $G''$ , and  $\tan \delta$  versus frequency or temperature. The storage modulus ( $G''$ ) is the real part of the complex modulus, and the loss modulus ( $G''''$ ) is the imaginary part. The damping coefficient ( $\tan \delta$ ) is the ratio of the loss modulus to the storage modulus. The critical strain ( $\epsilon_c$ ) is the strain at which the storage modulus begins to decrease with increasing strain.



Dynamic Mechanical Analysis of High Temperature Polymers 1. Abstract This paper investigates the material properties of several high temperature polymers (PBI, PI, PEEK, PAI, PEI and their blends) over a broad temperature range using Dynamic Mechanical Analysis (DMA). The materials are compared through their storage modulus

# DMA STORAGE MODULUS SUDDENLY INTERRUPTED




If storage modulus is greater than the loss modulus, then the material can be regarded as mainly elastic. Conversely, if loss modulus is greater than storage modulus, then the material is predominantly viscous (it will dissipate more energy than it can store, like a flowing liquid). Since any polymeric material will exhibit both storage and



INTRODUCTION. Dynamic mechanical analysis (DMA) has become an important materials characterization tool which can unveil the complex elastic modulus of solids and thus becomes an inseparable component of any materials science laboratory to correlate the structure and property of solids [1, 2]. Elastic modulus or modulus of elasticity is a measure of ???



DMA measures the mechanical properties of materials by applying an oscillating force to a sample and measuring its response. The technique allows for the determination of the material's stiffness and damping properties, which are expressed as the storage modulus (elastic response) and loss modulus (viscous response), respectively.

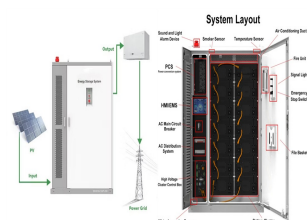

The Young's Modulus or tensile modulus (also known as elastic modulus, E-Modulus for short) is measured using an axial force, and the shear modulus (G-Modulus) is measured in torsion ???



Storage modulus  $E'$  ??? MPa Measure for the stored energy during the load phase Loss modulus  $E''$  ??? MPa They were deduced via dynamic mechanical analysis of different materials and material classes at a temperature of 30 °C. Figure 6: The loss factor  $\tan \delta$  and the according Young's modulus of various materials, deduced via DMA at a

# DMA STORAGE MODULUS SUDDENLY INTERRUPTED



Viscoelastic parameters obtained from DMA tests

The Elastic (Storage) Modulus: Measure of elasticity of material. The ability of the material to store energy.

The Viscous (loss) Modulus: The ability of the material to dissipate energy. Energy lost as heat.

Complex Modulus: Measure of materials overall resistance to deformation.

Tan Delta:



It is well known that the mechanical properties of polymers are highly dependent on the temperature and strain rate, or frequency. Dynamic Mechanical Analysis (DMA) is a valuable tool for evaluating frequency- and temperature dependence of the complex modulus [9, 10]. Essential features that can be measured include storage modulus, loss modulus, tan delta, ???



Tan delta is just the ratio of the loss modulus to the storage modulus. It peaks at the glass transition temperature. The term "tan delta" refers to a mathematical treatment of storage modulus; it's what happens in-phase with (or at the same time as) the application of stress, whereas loss modulus happens out-of-phase with the application of